


Swing doors

PVC swing doors

Assembly scheme

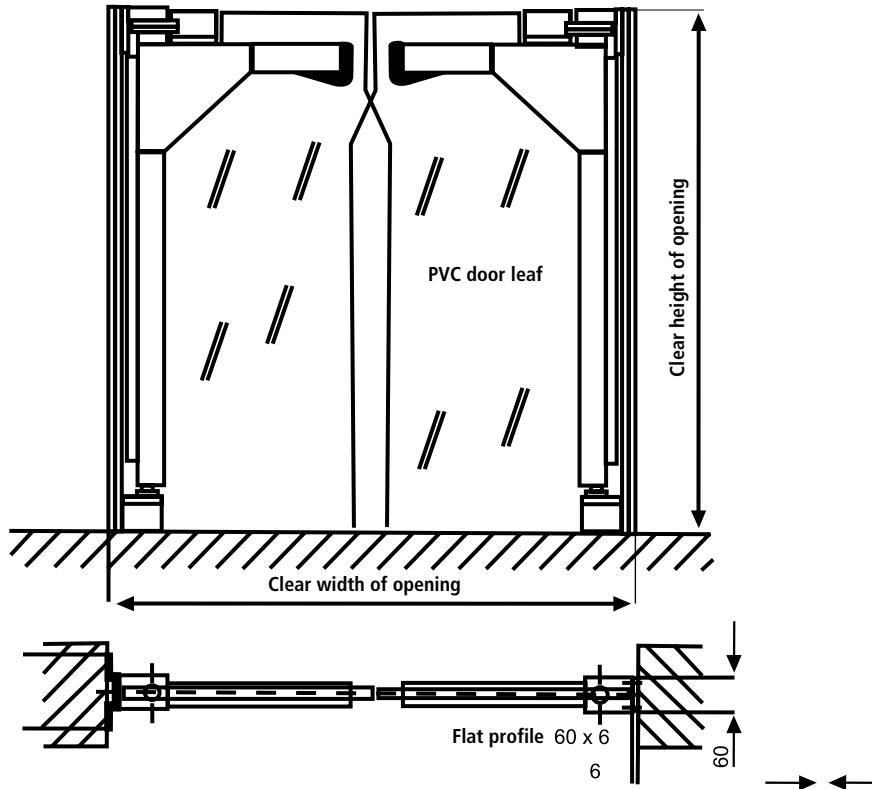

- Heavy-duty industrial design
- Door leaf out of approx. 7 mm thick plasticised PVC in transparent design
- Door leaf temperature resistant from -20 °C to + 60 °C
- Additional plastic corner reinforcement to protect from tearing
- Closing device with individually adjustable closing force, integrated into the frame profile, for 90 degree opening angle from both sides
- Door frame as flat profile
- Fully pre-assembled and designed for simple self-erection